



SERIOUS DATA SECURITY.
REAL SERIOUS.

SEAL-R5000KP




RFID + PIN DUAL-FACTOR AUTHENTICATION

- Requires manufacturer's administration software suite
- Keypad for two-factor authentication
- LED for handle and temperature status
- No key override
- TCP/IP Ethernet
- 125kHz HID Prox
- 13.56MHz HID iClass, Mifare Classic, Mifare DESFire
- EV1, Mifare DESFire EV2
- Storage capacity for 2,000 cards and pins
- Storage capacity for 500 events (offline) and 30 time profiles
- PoE IEEE 802.3af (Power over Ethernet) capable

See back page for handle specs

DIMENSIONS

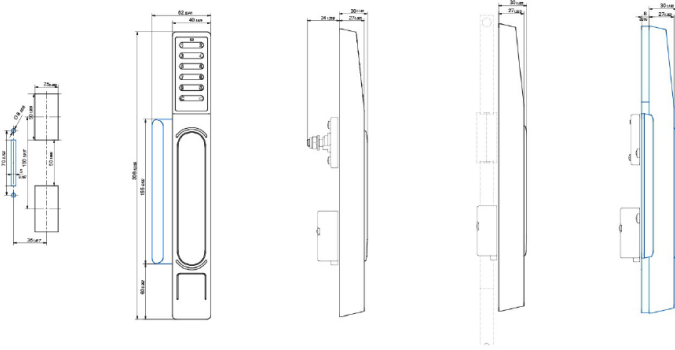

LED STATUS



SEAL-MLR5000KP TECHNICAL SPECIFICATIONS

Power Supply: 12 V ± 10% (DC)

Bias-Current: 40mA (DC)

Max Current: 440mA (DC)

Temperature range: -20C to + 70C

Sheet metal thickness from 1.5-2mm (plus powder coating)

Top mounting screws Tq to 1.0-1.2Nm

Bottom cap screws Tq to 0.4Nm

CONNECTIONS

